



## **5600 SERIES FLAIL WINDROWER**

### **15- & 20-FT MODELS**



- *Shred and windrow in one pass*
- *Big windrows save time at harvest*
- *Quickly converts from windrowing to conventional shredding*

A Hiniker 5600 Series Flail Windrower can substantially cut your field time by shredding and windrowing stalks in one pass. Both the 5610 15-ft flail shredder and the 5620 20-ft flail shredder use a full width end-delivery cross auger to build neat, uniform windrows ready for baling or stacking.



**Model 5610**



**Model 5620 in tow using optional end transport package.**


***A More Efficient Way To Harvest Stalks***

## Save Harvesting Time with the Hiniker 5600 Series



5620 with optional end transport package shown.

Equipped with a unique augering system the 5600 Series Windrowers give you the potential to reduce harvesting trips across the field by 50%.

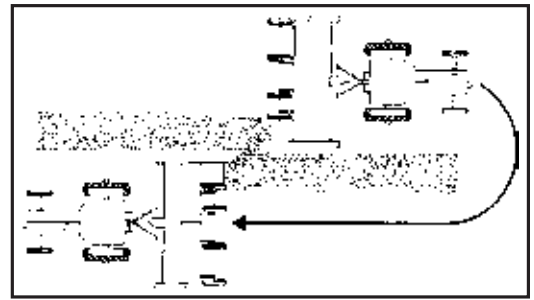

The **5610** gives you a choice of 6- or 12-row windrows and a 15-ft cutting width while the **5620** offers a choice between 8- or 16-row windrows and a 20-ft cutting width. To achieve maximum windrow size, the operator simply doubles back and lays a second windrow adjacent to the first one.


## Windrow or Spread Stalks



Converting from windrowing to spreading is easily done in just a few minutes time. Just disable the auger drive and open the hinged cover doors. With the compact design of the 5600 Series, there's no need to move bulky sheet metal deflectors in or out.




5610 Shown

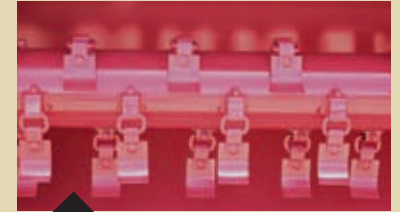


High-vacuum 3-inch cup knives ensure clean, thorough shredding. Rotors are factory spin balanced for smooth operation.



235 hp rated Superior™ gearboxes provide long-life trouble-free performance.

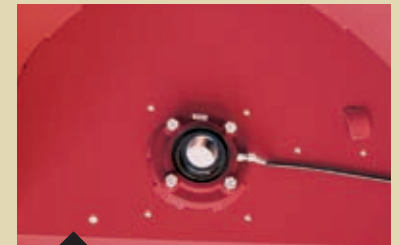

All rotor and drive shaft bearings are 2-inch diameter self-aligning. Bearings are triple lip sealed and shielded. Rotor bearings are precision piloted for long term stability and life.

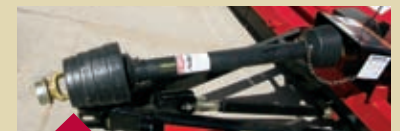

Constant-velocity P.T.O shafts are standard equipment to reduce drive-line vibration and knocking when turning. An overrunning clutch is also included, providing protection for both tractor and shredder.

### SPECIFICATIONS

	5610 WINDROWER	5620 WINDROWER
Width of Cut	15 ft.	20 ft.
Field Overall Length	148"	148"
Standard Knife Type	1/4" x 3" high vacuum cup	1/4" x 3" high vacuum cup
Knife Tip Speed @ 1000 RPM	8022 ft./min.	8022 ft./min.
Number of Knives	72	96
Total Cuts/Minute @ 1000 RPM	89,136	118,848
Cross Auger	14" O.D. x 18" Pitch	14" O.D. x 18" Pitch
1 3/4" (1000) 20 Spline PTO	Optional	Optional
1 3/8" (1000) 21 Spline PTO	Optional	Optional
Constant Velocity PTO	Standard	Standard
Premium Matched "C" End Drive Belts	4 (w/spring loaded idler)	6 (w/spring loaded idler)
15 x 5KB 6 Bolt Wheels	4	4
Recommended Tires	7.60 x 15-4PR, or Equal	7.60 x 15-4PR, or Equal
Approximate Field Weight (w/Tires & Jack)	4300 lbs./1950 kg.	6105 lbs. (includes end transport pkg.)

### ACCESSORY EQUIPMENT

	5610 WINDROWER	5620 WINDROWER
Ratchet Lift Jack	1	2
Hydraulic Cylinders & Hoses	1	2
End Transport Kit	NA	1

WE RESERVE THE RIGHT TO AMEND THESE SPECIFICATIONS AT ANY TIME WITHOUT NOTICE. THE ONLY WARRANTY APPLICABLE IS OUR STANDARD WRITTEN WARRANTY. WE MAKE NO OTHER WARRANTY, EXPRESSED OR IMPLIED.



**HINIKER COMPANY**  
 58766 240 St. • P.O. Box 3407  
 Mankato, MN 56002-3407  
 Phone (507) 625-6621  
 FAX (507) 625-5883  
[www.hiniker.com](http://www.hiniker.com)